Storage Choke, flat design



Description

- Storage choke
- THT-terminals
- Inductor horizontally positioned in housing
- Constant inductance at high alternating field modulation and large DC
- magnetization
- Reduced magnetic reversal
- SMD version on request

Technical Data

Rated voltage	up to 600 VDC
Rated Current	0.45 - 4.5 A @ Ta 70 °C
Rated inductance	0.011 - 3.7 mH, Tol. ±15%
Power Operating Frequency	up to 1 MHz
Terminal Type	THT
Weight	7 - 18g
Material: Housing	UL 94V-0
Sealing Compound	UL 94V-0

Approvals and Compliances

Applications

- Storage of energy in switched power supplies
- Switch-mode
- Chopper amplifiers
- DC drives and stepper motor controls

Weblinks

pdf datasheet, html-datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, SPICE Library

Isolation Voltage	2kV eff., winding to ambient
Climatic Category	40/125/21 acc. to IEC 60068-1
Allowable Operation Temp.	-40 °C to 125 °C

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Application standards

oHS

REACH

Application standards where the product can be used

RoHS

REACH

China RoHS

101000000000000000000000000000000000000		-	
Organization	Design	Standard	Description
IEC.	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technologyequipment.
Compliances The product comp	olies with following Guide Lines		
Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on

SCHURTER AG

SCHURTER AG

SCHURTER AG

the efficiency in			Demulation	705/0000
its affixing in	accordance	with FU	кеошатоп	705/2008
no annang m			nogalation	


EU Directive RoHS 2011/65/EU

The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.

On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimension [mm] Case 04-1

Case 15-1

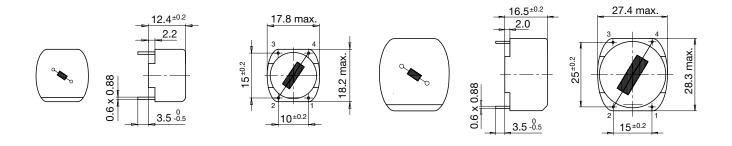


Diagrams

Application in DC-DC Converter



1) DC-Input unregulated
2) DC-Output regulated

Derating Curves

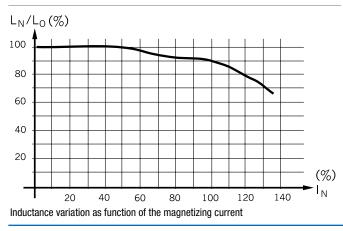

All Variants

I _n [A]	L _n [mH]	R _{cu} [mΩ]	f _{res} [MHz]	Weight [g]	Housings	Packing unit [pcs.]	Order Number	
0.6	0.5	360	2.5	7 g	04-1	45	DSF-18-0002	
1.2	0.125	90	6.5	7 g	04-1	45	DSF-18-0003	
2	0.045	32	12	7 g	04-1	45	DSF-18-0005	
4	0.011	8	32	7 g	04-1	45	DSF-18-0006	
0.45	3.7	1900	0.6	18g	15-1	40	DSF-28-0001	
1	0.75	360	1.8	18g	15-1	40	DSF-28-0003	
1.4	0.38	160	-	18 g	15-1	40	DSF-28-0004	
1.8	0.23	125	3.5	18 g	15-1	40	DSF-28-0005	
3.15	0.075	45	7	18 g	15-1	40	DSF-28-0006	
4.5	0.018	10	18	18 g	15-1	40	DSF-28-0008	
4.5	0.037	20	10	18 g	15-1	40	DSF-28-0007	

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-Schurter