CS48USB

48-Device USB Charging Station with Syncing



Holds Up to



2.4A USB Charging per Port



250 lb. Load Rating



Sturdy Steel Construction



Locking Doors & Side Panels




Adjustable Storag Shelf Dividers



Ventilated for Ample Airflow


- A Locking Rear Door
- **B** Locking/Reversible Front Door
- C Horizontal Rails
- **D** Vertical Mounting Rails
- **E** Secure Top and Bottom Cable Access Plates
- F Vents
- **G** Locking/Removable Side Panels
- H 1U Rack-Mountable 16-Port USB Charger Hub
- Adjustable 16-tablet Storage Shelf
- Keys

Also Includes: Owner's Manual



For applications requiring extra mobility, an optional caster kit (Model: CSHANDLEKIT) contains two swivel/locking casters and two swivel-only casters that attaches to the bottom of a charging station unit.

Specifications

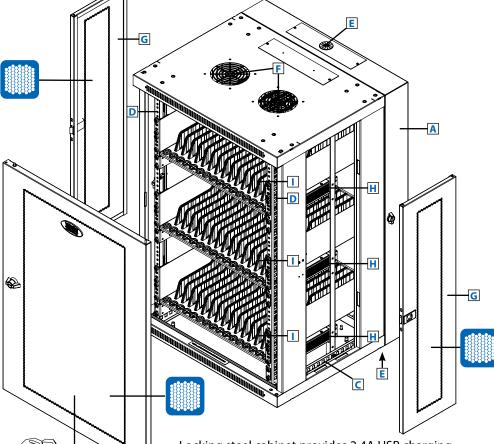

- Locking steel cabinet provides 2.4A USB charging, syncing, secure storage and cord management for up to 48 tablets and other USB devices
- Supports iPad®, Android™, Surface™ and Kindle tablets
- Adjustable/removable storage shelf dividers accommodate thicker devices
- Door locks with included keys prevent device theft, damage or tampering

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com







Specifications	RoHS
Model	CS48USB
Maximum Devices Per Shelf	48
Charger/Hub Ports	48 x USB 2.0 A (Female)
	3 x USB 2.0 B (Female)
	3 x USB 2.0 mini (Female)
Equipment Mounting Depth	20.5 in. / 521 mm
Load Rating*	250 lbs. / 113 kg
Unit Dimensions (H x W x D)	35.6 x 23.6 x 21.6 in. / 904 x 600 x 548 mm
Unit Weight	96 lb. / 43.5 kg
Transmission Speed	Up to 480 Mbps
Power Requirement	Input: 100-240V, 2.5A, 50/60 Hz
	Output: 5.0V, 2.4A Max (per USB port)
Standards	Meets UL 60950, TUV (US and Canada),
	NOM (Mexico) and RoHS standards

*The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.

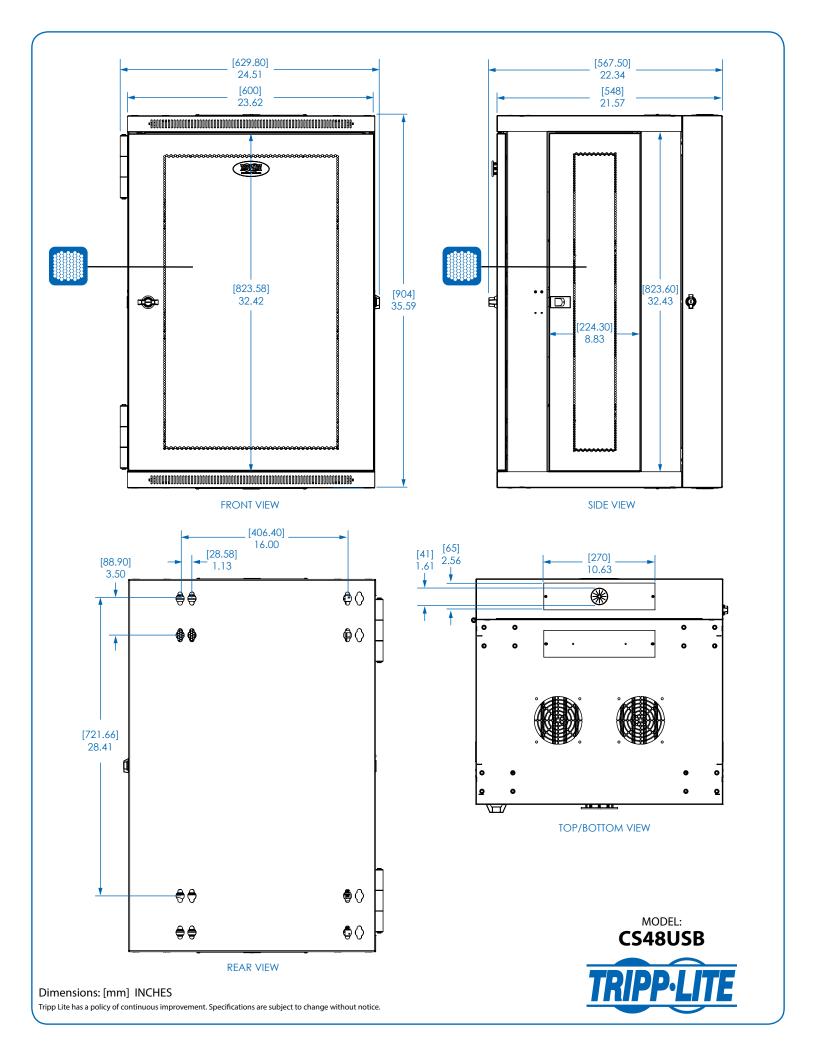

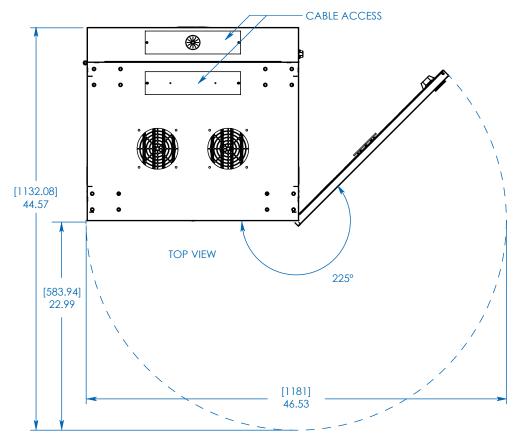

FRONT OPENING

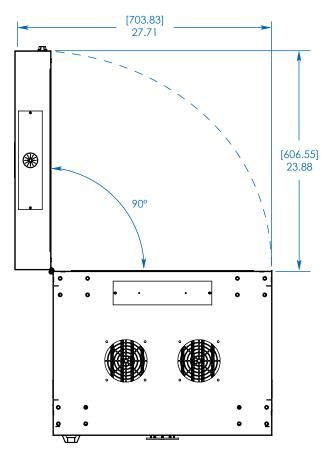


REAR OPENING


TRIPP·LITE

MODEL: CS48USB


Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.





SHELF TOP VIEW

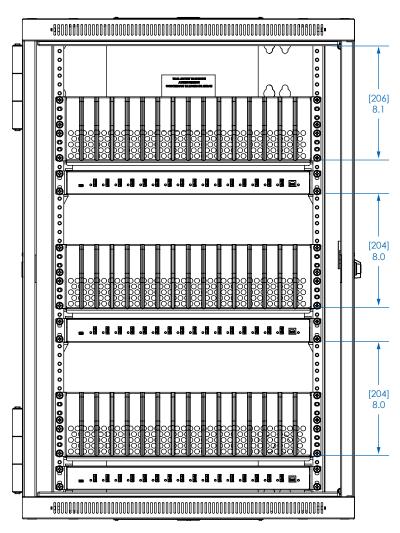

CABINET FRONT VIEW



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.