




Ī	Date	SYM	REVISION	RECORD	AUTH	DR.	CK.
Ī							

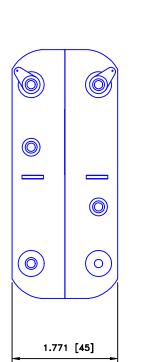

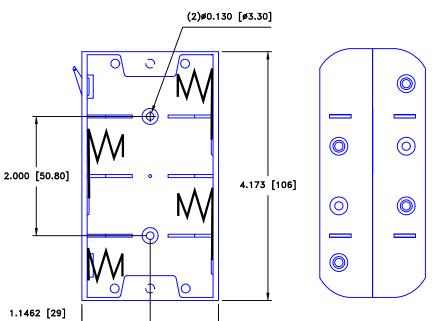



Solder Lugs shown

## ORDERING CODE BH48C

## **SPECIFICATIONS**

Plastic material— polypropylene Springs— nickel plated spring steel Wire— 26 AWG, UL1007, CSA Rivets— Brass, nickel plated 9Volt snaps— Brass, nickel plated L-Solder Lugs
W-(6") Wire Leads
SF-9Volt type snaps
B- Bump plates

2.283 [58]

Tolerance	Mem	Memory Protection Devices, Inc					
(Except as noted)	200	200 Broad Hollow Road, Farmingdale, New York 11735					
decimal			Scale	Drawn By T.S.			
±.020 (.5)			1=1	Approved By T.B.			
Fractional	Title	202 000 000					
±.030 (.8)	EIGHT "C" CELL HOLDER						
Angular	Date	Drawing Nu	mber				
± 3°	8/31/00	BH48CL					