
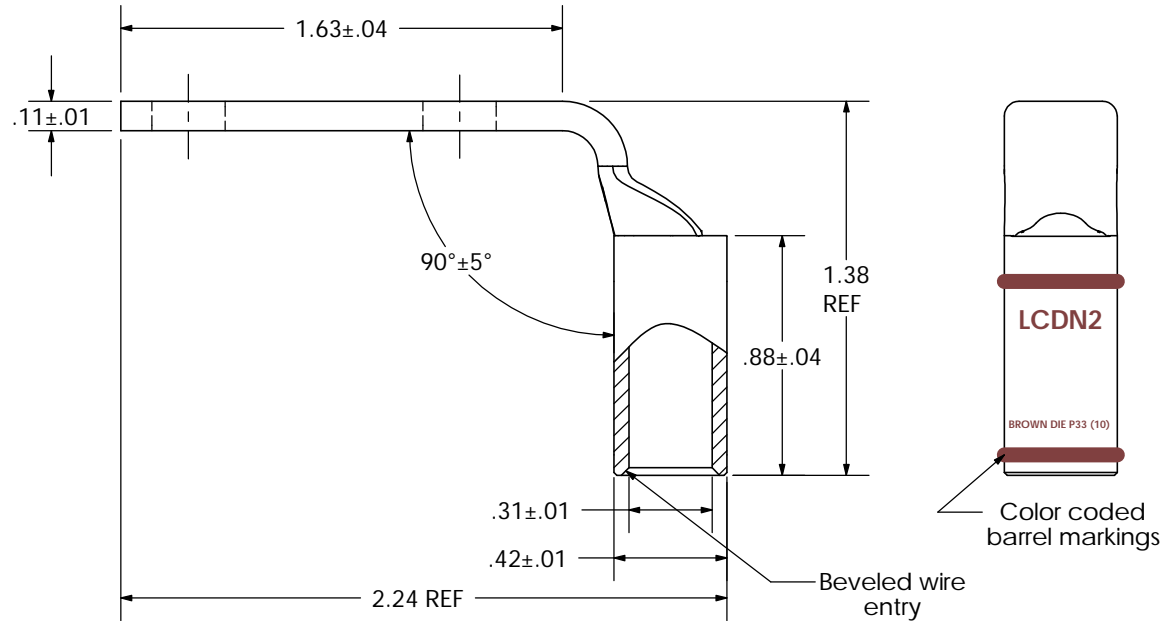


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|--|--|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 2 AWG |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 15/16 in. |
| Stud Size | 1/4 in. |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | BROWN |
| Panduit Die Index No. on Barrel | P33 |
| Alternate Industry Die Index No. () on Barrel | (10) |

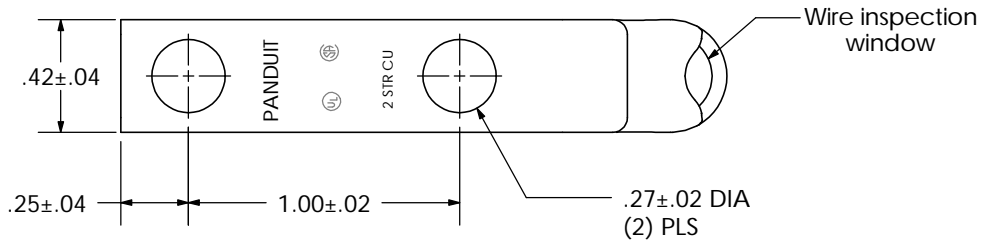

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCDN2-14DF-Q
Copper Lug - Two-Hole Narrow Tongue, Standard Barrel, 90° Angle Tongue

| | | | | | |
|----|------|------|------|---|---------|
| 01 | 7/05 | JHNU | TLCO | CHANGED BARREL MARK FROM PANDUIT TO LCDN2 TONGUE THICKNESS WAS .12 | PC00065 |
|----|------|------|------|---|---------|

| REV | DATE | BY | CHK | DESCRIPTION | ECN | SCALE | DRAWING NO / CAD FILE |
|-----|------|----|-----|-------------|-----|-------|-----------------------|
| | | | | | | N/A | LCDN2-14DF-CUST |